



The **G6 COLOR** is a cinema-grade 175W full-color ellipsoidal with razor-sharp cuts and a unique 360 degree rotating barrel. The beam produced from either the 19°, 36° or 50° lens tube is uniform and bright without any color fringing. At the core of the G6 is the latest generation of Fiilex's patented Dense Matrix LED that adheres to the highest standards of dimming and color calibration. The G6 ellipsoidal gives you full control and can be rigged and hidden anywhere on production sets.



## FEATURES

- High-CRI white light output (2000-10000K)
- 8 and 16-bit color modes: CCTRGBW, CCTHSI, CIEy, etc.
- IP-X5 Rating (water resistant)
- Easy PSU / battery mounting on yoke
- Razor-sharp cuts and rotating barrel
- Wireless control via integrated LumenRadio
- Hardline DMX via XLR-5 adapter
- Smooth and Sharp dimming modes
- DMX-controllable fan modes: Full, Auto, Silent, Off
- Compact and easy to hide



## BEAM PROFILE

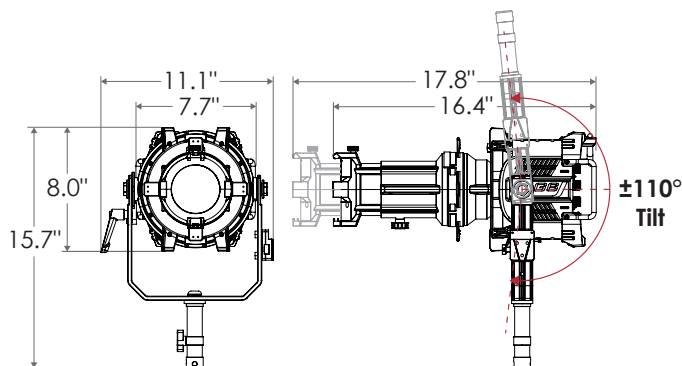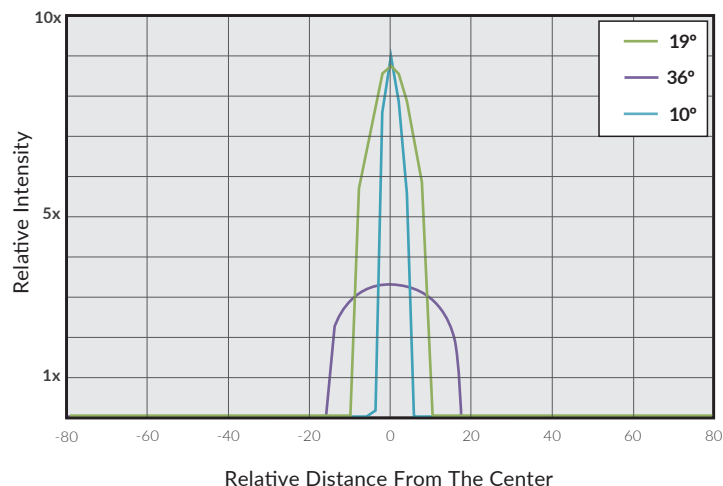

### SPECIFICATIONS

|                       |                                                                         |
|-----------------------|-------------------------------------------------------------------------|
| Beam Angle            | 19° / 36° / 50° lens tube                                               |
| CCT Range             | 2000-10000K continuous tuning + magenta/green shift                     |
| CRI / TLCI            | 95 / 90 typical                                                         |
| Control Modes         | CCT, HSI, RGBW, GEL, CCTRGBW, CCTHSI, CIEy, ICTHS, and more             |
| Dimming               | 100% - 0% flicker free                                                  |
| Dimming Modes / Curve | Smooth, Sharp / Linear, Gamma                                           |
| Light Engine          | DiCon Dense Matrix LED                                                  |
| Power Consumption     | 175W max AC   160W max DC                                               |
| BTUs/hour             | 596 (BTUs/hour) max                                                     |
| DC Input              | 24 - 48V DC (via XLR-3 Port)                                            |
| AC Input              | 100 - 240V AC, 50 ~ 60Hz                                                |
| DMX/RDM Port          | XLR-5 in and out                                                        |
| Wireless Control      | Integrated LumenRadio CRMX                                              |
| USB Power Output      | 5V/1A (via USB-A)                                                       |
| Weight                | Fixture: 11lbs / 5.0kg (With lens tube)   Power adapter: 3.3lbs / 1.5kg |
| Size (L x W x H)      | 16.4" x 11.1" x 15.7" / 41.7cm x 28.4cm x 39.9cm                        |
| Mount Type            | Combo (baby stud female / junior stud male)                             |
| IP Rating             | IP-X5 (water-resistant)                                                 |
| Thermal Design        | Controllable fan (OFF / SILENT / AUTO / FULL)                           |
| Operating Temperature | 0 - 40°C / 32 - 104°F                                                   |
| GoBo Size             | M Size (Diameter 66mm / Max Image: 48mm / Max Thickness: 1mm)           |

### PHOTOMETRIC DATA

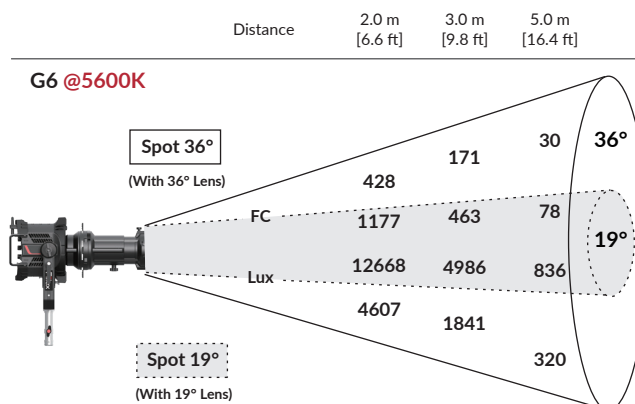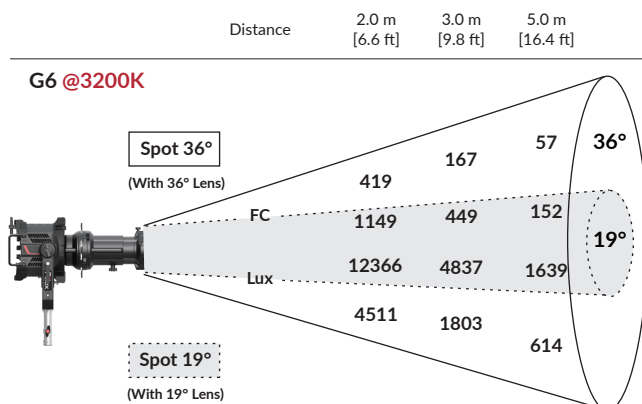

### OPTIONAL ACCESSORIES



FLXRP-HEAD



FLXG6CLR-LEKO19



FLXG6CLR-LEKO36



FLXG6CLR-LEKO50



FLXG6CLR-GOBOHOLDER



FLXG6CLR-GOBOSET